

## DSOX1200A/Gシリーズの周波数帯域アップグレード手順書

初めに

ご購入いただきました DSOX1200A/G シリーズオシロスコープは、周波数帯域アップグレードが別添となっておりますので、お客様による作業が必要です。お手数ですが以下要領でアップグレードしてください。


おおまかな流れは次の通りです。事前に USB メリをご用意ください

1. オシロスコープ Host IDの確認
2. ユーザ登録（アカウント登録）
3. ライセンスシート記載事項をウェブに入力
4. ライセンスファイルをインストール

### 1. オシロスコープの Host ID を確認して USBメモリに保存します

- 1-1 オシロスコープの電源を入れ、フロントパネルに USB メリを挿す。
- 1-2 【Utility】 - [サービス] - [Export Host ID] で HostIDをテキストファイル保存
- 1-3 USBメモリを抜く

### 2. キーサイトのウェブから、ユーザ登録をします

- 2-1 キーサイトサポートにログイン <https://support.keysight.com/s/?language=ja>
- 2-2  から [登録はこちら] を選択（登録済の方は3へ進む）




- 2-3 氏名、メールアドレス、会社名等の必要な情報を記入して、アカウント作成ボタンをクリック
- 2-4 登録したメールアドレスに送られてきたメールを開いて登録完了のリンクをクリック

### 3. ライセンスシートに記載された情報をウェブ画面に入力します

- 3-1 測定器欄から「キーサイト・ソフトウェア・マネージャー」をクリック



### 3-2 「ENTITLEMENTMANAGEMENT」をクリック

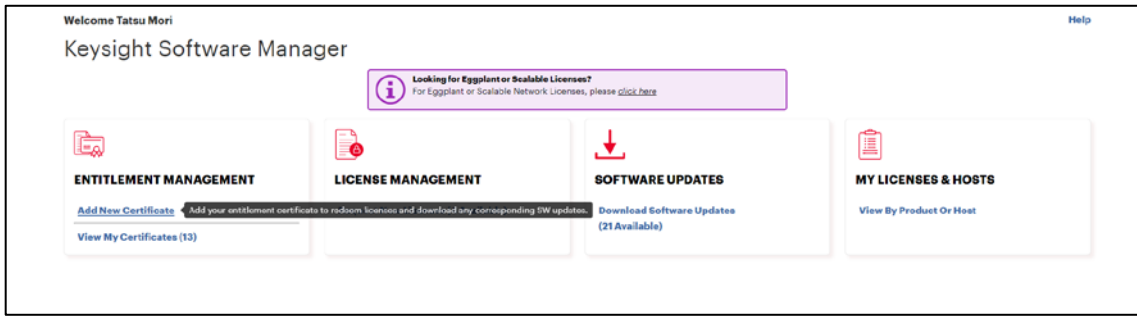

### 3-4 Software Entitlement Certificate に記載されている Order Number、Certificate Number を入力して、続行ボタンをクリック

KEYSIGHT

Return to Main Menu

Welcome Tatsu Mori

Keysight Software Manager

**Add New Certificate**

Please Add a Certificate to Associate Your License Entitlements to Your Account.

Order Number \*


1234567-000001

Certificate Number \*

ABCD-EFGH

Find Certificate

### 3-5 「LICENSE MANAGEMENT」の「Request New License」をクリック

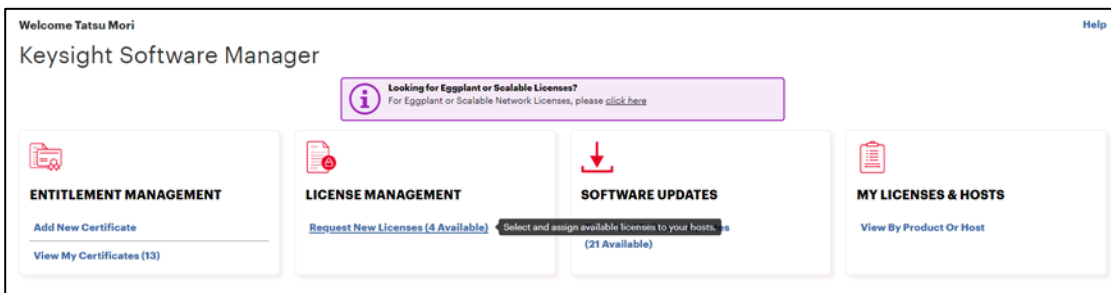

### 3-6 D1200BW1A, D1200BW2A または D1200BW3A をチェックして「Assign Products to Host」をクリック

Return to Main Menu

Welcome Tatsu Mori

Keysight Software Manager

**Request New Licenses**

Assign Products to Hosts License Preview License Download

**My Products**

Assign Products to Host

<input checked="" type="checkbox"/>	Product Number	Description	Qty	Assign Qty	License Expiration Date	Support Expiration Date
<input checked="" type="checkbox"/>	D1200BW2A	Bandwidth upgrade, 70 MHz to 200 MHz, for DSOX1204X, fixed perpetual license	1	1		
<input type="checkbox"/>	DSAS9804A	Oscilloscope - Infinium 8GHz	1	1		
<input type="checkbox"/>	DSO90000A-009	InfiniIcon; fixed perpetual license	1	1		
<input type="checkbox"/>	DSO90000A-08A	DSA includes 50M memory; high-speed SDA; EZIT-plus and noise reduction features; fixed perpetual license	1	1		

3-7 空欄に USB メモリに保存した Host ID を入力して、「Save Host ID」をクリック

### Assign Host

InfiniVision 1200 X-Series scope (for DSOX1204 bandwidth licenses)

Product Number	Description	Qty
D1200BW2A	Bandwidth upgrade, 70 MHz to 200 MHz, for DSOX1204X, fixed perpetual license	1

Cancel Changes Save Host ID

3-8 License Preview をクリック

Return to Main Menu

Welcome Tatsu Mori Help

## Keysight Software Manager

### Request New Licenses

1 Assign Products to Hosts 2 License Preview 3 License Download

My Assigned Products

Host DSOX1204G,CN61537262,G1Q3AYUE7DEEQDK6

License Preview

My Products

Assign Products to Host

Product Number	Description	Qty	Assign Qty	License Expiration Date	Support Expiration Date
----------------	-------------	-----	------------	-------------------------	-------------------------

3-9 Request License をクリック

KEYSIGHT Contact Us

Return to Main Menu

Welcome Tatsu Mori Help

## Keysight Software Manager

### Request New Licenses

1 Assign Products to Hosts 2 License Preview 3 License Download

My Assigned Products

Host DSOX1204G,CN61537262,G1Q3AYUE7DEEQDK6

Product Number	Description	Qty	License Expiration Date	Support Expiration Date
D1200BW2A	Bandwidth upgrade, 70 MHz to 200 MHz, for DSOX1204X, fixed perpetual license	1		

Request Licenses

3-10 Yes, I am Sure をクリック

KEYSIGHT Contact Us

Return to Main Menu

Welcome Tatsu Mori Help

## Keysight Software Manager

### Request New Licenses

1 Assign Products to Hosts 2 License Preview 3 License Download

My Assigned Products

Host DSOX1204G,CN61537262,G1Q3AYUE7DEEQDK6


Product Number	Description	Qty	License Expiration Date	Support Expiration Date
D1200BW2A	Bandwidth upgrade, 70 MHz to 200 MHz, for DSOX1204X, fixed perpetual license	1		

Request Licenses

**Are you sure you want to generate licenses?**  
This task cannot be undone once a host is assigned and a license is generated.

Please Cancel Yes, I am Sure

3-11 しばらくすると Email All Licenses と Download All Licenses が赤になるので Download All Licenses をクリックする。ポップアップが表示された場合は、許可する、あるいは OK をクリック。ダウンロードフォルダにあるライセンスファイルを USB メモリにコピーします。

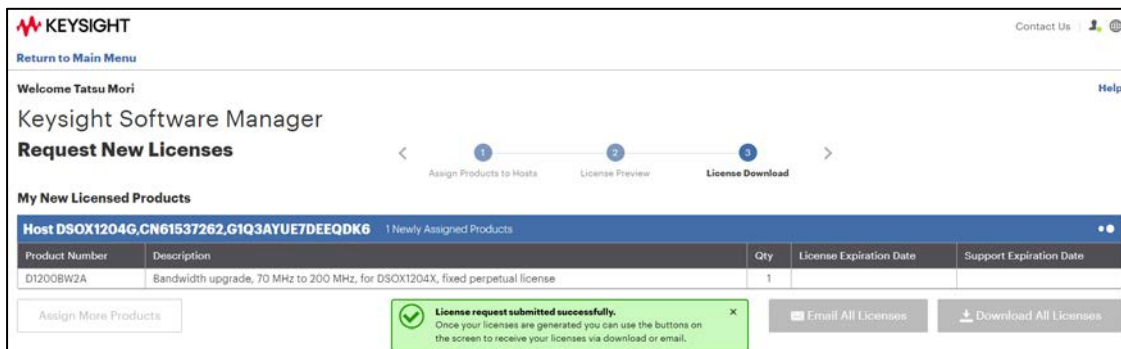

Assign More Products

License request submitted successfully.  
Once your licenses are generated you can use the buttons on the screen to receive your licenses via download or email.

Email All Licenses

Download All Licenses

#### 4. ライセンスファイルをオシロスコープにインストールします

4-1 オシロスコープの電源を入れ、フロントパネルに USB メモリを挿す


4-2 【Utility】 - 【File エクスプローラ】 - (USB メモリ)

4-3 ファイル一覧表示されたら Entry ノブを回転させてライセンスファイル(\*.lic)を選択、「ロードファイル」を押す

※ライセンスがインストールされるとメッセージが表示されます

4-4 電源を再起動

※ 【Help】ボタン - 【オシロスコープについて】 で、「インストール済ライセンス」欄を確認

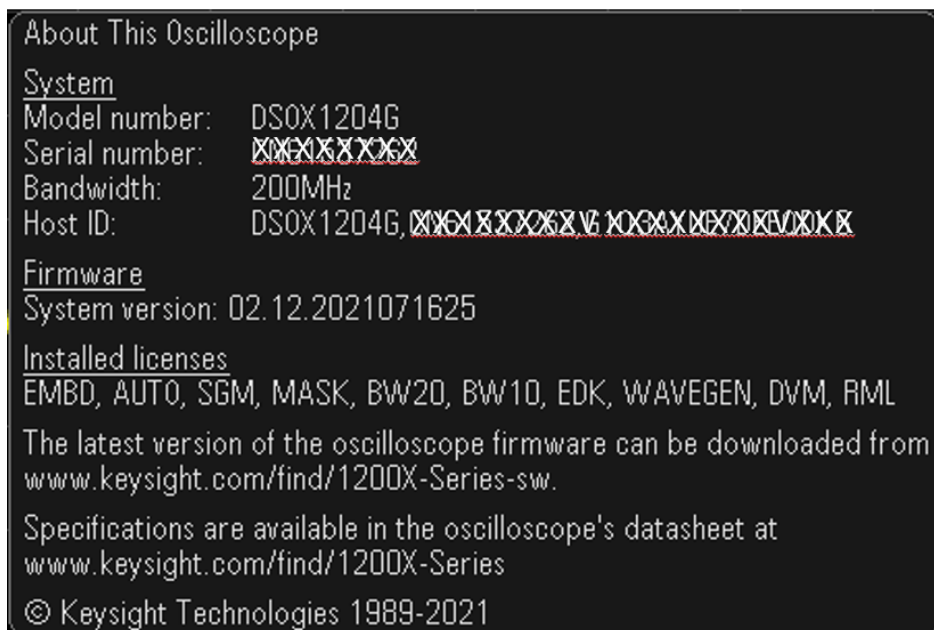

#### 5. ライセンスシートに添付されている周波数を示すシールをオシロ本体に貼り付けます

